



东沃电子  
DOWOSEMI

**DW05DUCS-B-E**

Order Code: DW05DUCS-B-E


Transient Voltage Suppressor

## Features

- Small Body Outline Dimensions:  
0.60 mm x 0.30 mm
- Bidirectional ESD Protection of one line
- Low Clamping Voltage
- Low Capacitance: 0.5 pF
- Working Voltage: 5 V
- Low Leakage Current

## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 20\text{kV}$  (air),  $\pm 18\text{kV}$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 5A (8/20 $\mu\text{s}$ )

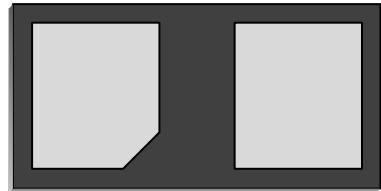

**DFN0603-D**


## Mechanical Characteristics

- DFN0603-D package
- Molding compound flammability rating:  
UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant

## Applications

- Cellular handsets and accessories
- Portable electronics
- Communication systems
- Computers and peripherals

## Schematic & PIN Configuration

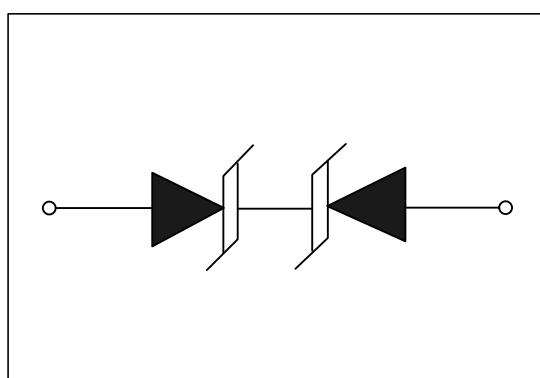


## Absolute Maximum Rating

Rating	Symbol	Value	Units
Electrostatic discharge Voltage	$V_{ESD}$	18KV (contact)	Volts
		20KV (air)	
Operating Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

## Electrical Parameters ( $T=25^\circ\text{C}$ )

Symbol	Parameter
$I_{PP}$	Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

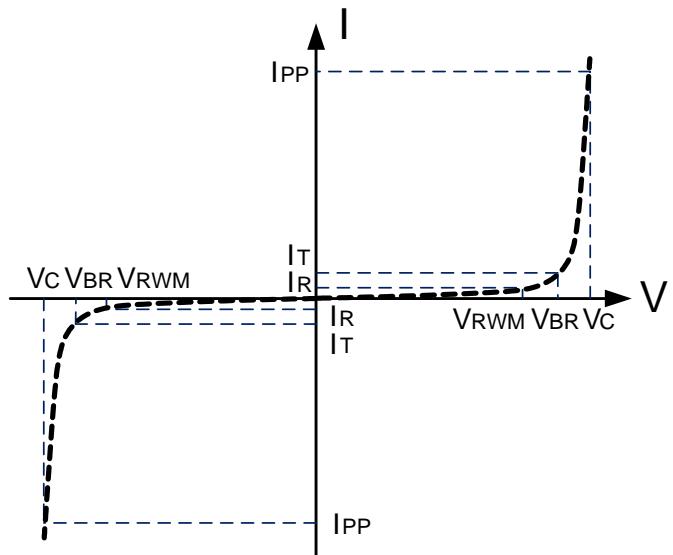

## Electrical Characteristics


DW05DUCS-B-E						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$				5.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1\text{mA}$	5.5		10.0	V
Reverse Leakage Current	$I_R$	$V_{RWM}=5\text{V}, T=25^\circ\text{C}$			1	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$			15	V
		$I_{PP}=5\text{A}, t_p=8/20\mu\text{s}$			26	
Junction Capacitance	$C_j$	$V_R = 0\text{V}, f = 1\text{MHz}$		0.5	0.6	pF

Note1: ESD Pulse Waveform according to IEC 61000-4-2. see Table1 and Figure4.


Note2: ESD tests Setup see Figure 5.

## Typical Characteristics


**Figure 1: Pulse Waveform**

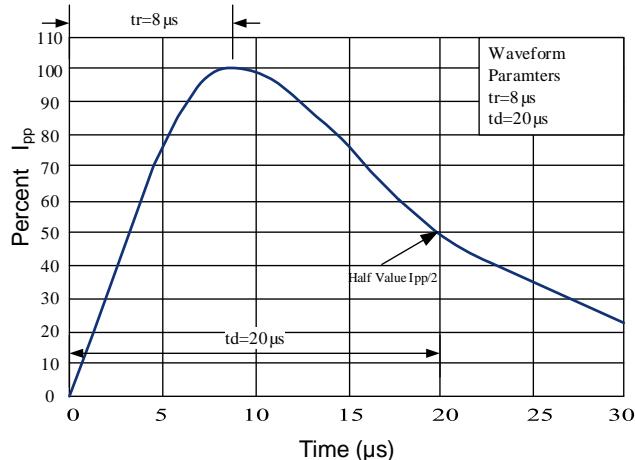

**Figure 2: Power Derating Curve**

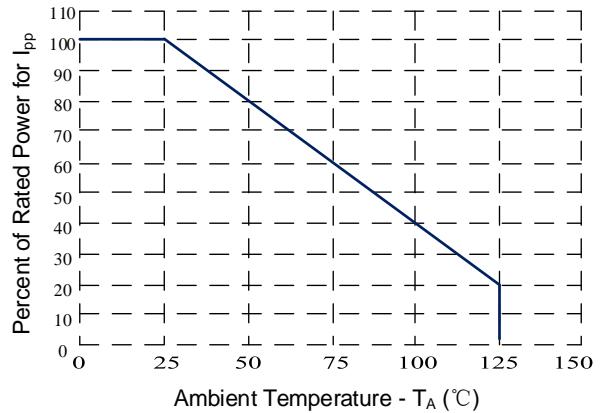


**Figure 3: Normalized Junction Capacitance**

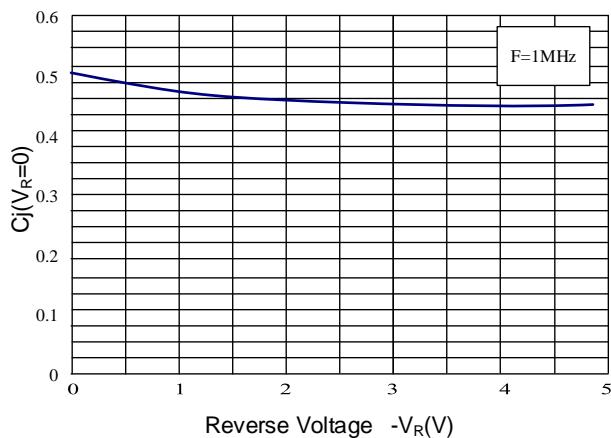


**Table 1. IEC 61000-4-2 Discharge Parameters**

Level	First Peak Current (A)	Peak Current at 30 ns (A)	Peak Current at 60 ns (A)	Test Voltage (Contact Discharge) (kV)	Test Voltage (Air Discharge) (kV)
1	7.5	4	2	2	2
2	15	8	4	4	4
3	22.5	12	6	6	8
4	30	16	8	8	15

**Figure 4: ESD Clamping( 8kV Contact per IEC 61000-4-2)**

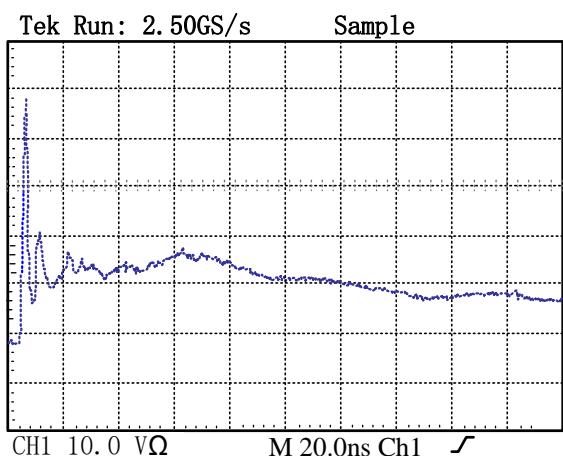


**Figure 5: IEC 61000-4-2 Waveform**

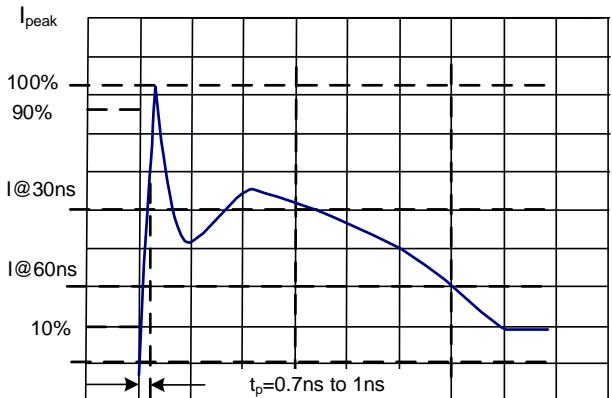

## Outline Drawing –DFN0603-D


### PACKAGE OUTLINE

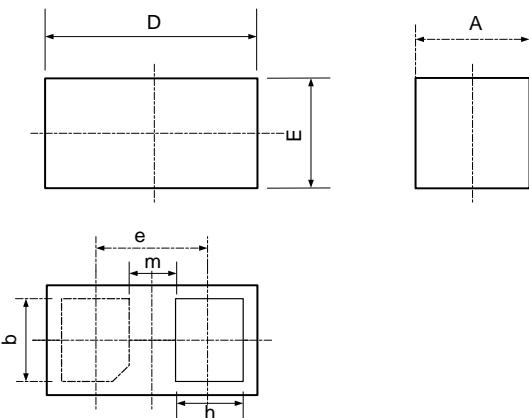

DFN0603-D

SYMBOL	MILIMETER	
	MIN	MAX
A	0.28	0.32
D	0.55	0.65
E	0.25	0.35
b	0.20	0.30
e	0.350	
m	0.165	
h	0.14	0.24

### Land Pattern

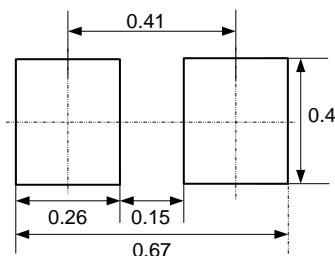

### Marking Codes

Part Number	Marking Code
DW05DUCS-B-E	 D = Specific Device Code M = Month Code

### Package Information

Qty: 15k/Reel