


## Features

- Small Body Outline Dimensions:
- Protects one I/O line
- Working Voltage: 12 V
- Low Leakage Current
- Response Time is Typically < 1 ns

## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 30\text{kV}$  (air),  $\pm 30\text{kV}$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 5A (8/20 $\mu\text{s}$ )

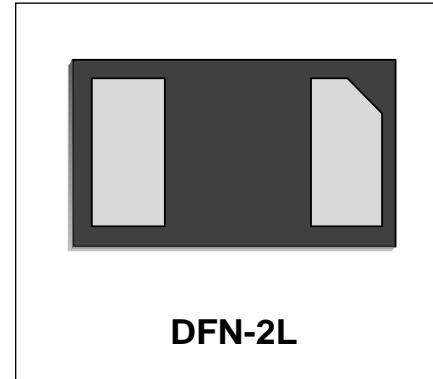


## Mechanical Characteristics

- DFN-2L package
- Molding compound flammability rating:  
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

## Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players


## Schematic & PIN Configuration

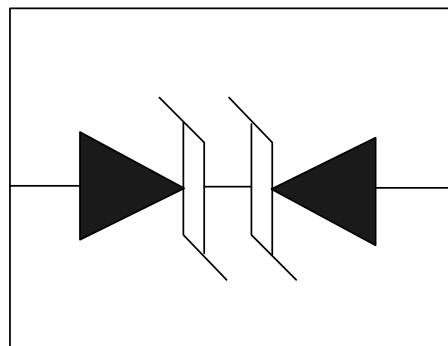

<b>Absolute Maximum Rating</b>			
<b>Rating</b>	<b>Symbol</b>	<b>Value</b>	<b>Units</b>
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	150	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{PP}$	5	A
Operating Temperature	$T_J$	-55 to +125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

## Electrical Parameters (T=25°C)

<b>Symbol</b>	<b>Parameter</b>
$I_{PP}$	Reverse Peak Pulse Current
$V_c$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current

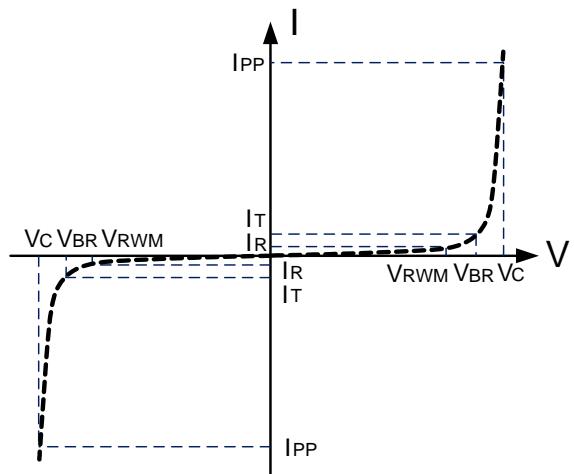

## Electrical Characteristics

<b>DW12DF-B-E</b>						
<b>Parameter</b>	<b>Symbol</b>	<b>Conditions</b>	<b>Minimum</b>	<b>Typical</b>	<b>Maximum</b>	<b>Units</b>
Reverse Stand-Off Voltage	$V_{RWM}$				12.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	13.3			V
Peak Pulse Current	$I_{PP}$	$t_p=8/20\mu s$			5	A
Clamping Voltage	$V_c$	$I_{PP}=1A, t_p=8/20\mu s$			20	V
Clamping Voltage	$V_c$	$I_{PP}=5A, t_p=8/20\mu s$			26	V
Reverse Leakage Current	$I_R$	$V_{RWM}=12V, T=25^\circ C$			200	nA
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$		11		pF


**Note1:** ESD Pulse Waveform according to IEC 61000-4-2 , see Table1 and Figure1

**Note2:** ESD tests Setup see Figure2.


**Note3:** The clamping Voltage data is taken with a 100x attenuator.

## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

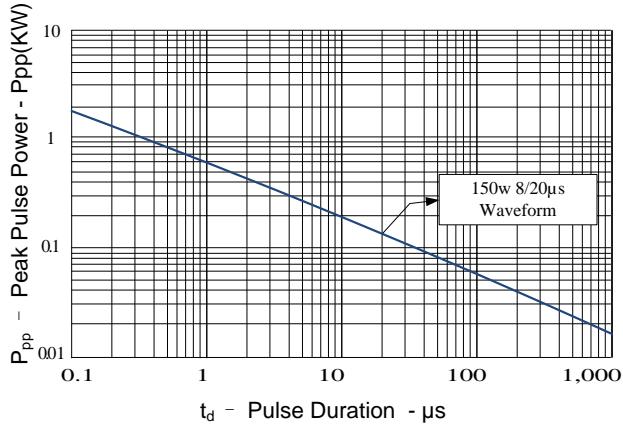


**Figure 3: Clamping Voltage vs. Peak Pulse Current**

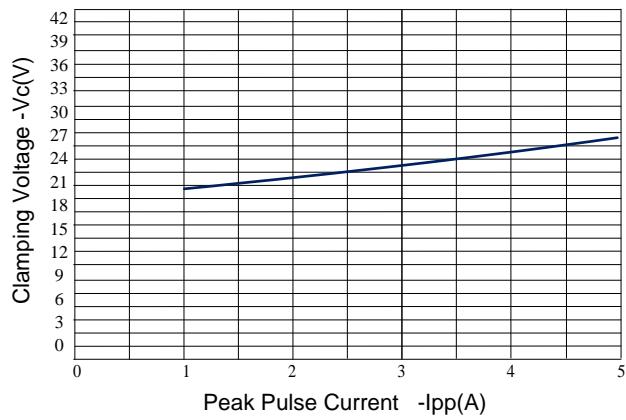


**Figure 5: 8/20μs Pulse Waveform**

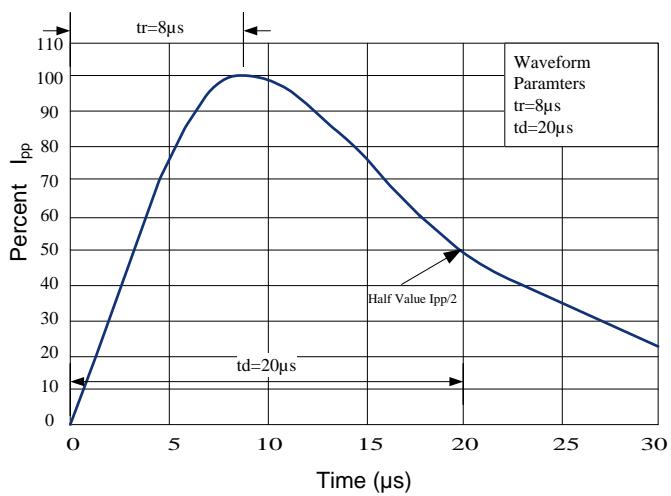


**Figure 2: Power Derating Curve**

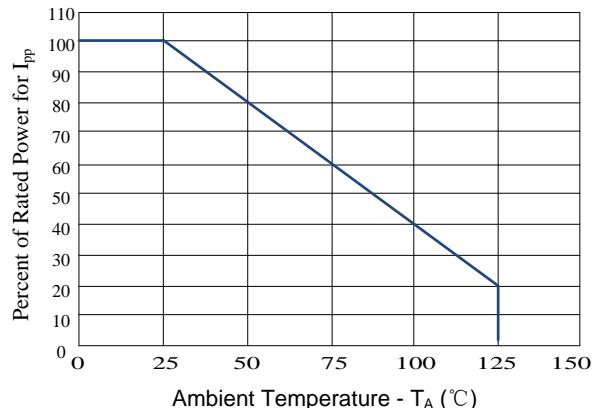

**Figure 4: Normalized Junction Capacitance vs. Reverse Voltage**

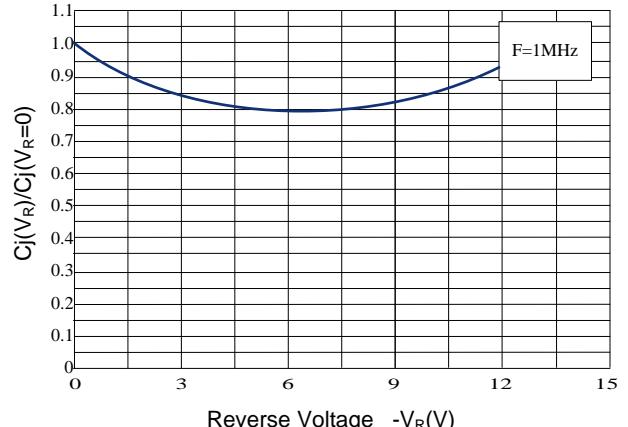

**Figure 6: ESD Clamping( 8kV Contact per IEC 61000-4-2)**

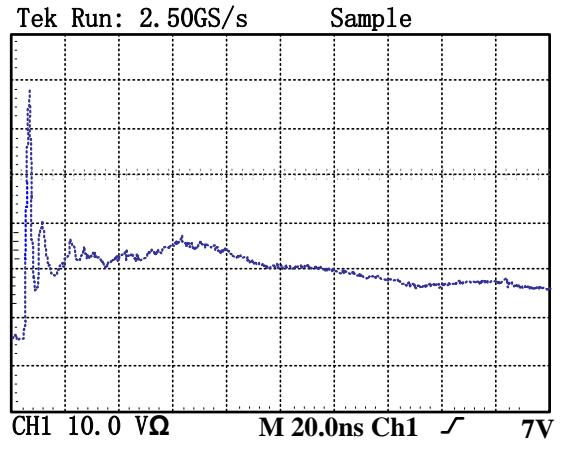


## Outline Drawing –DFN-2L

PACKAGE OUTLINE			
SYMB	MILIMETER		
	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
C	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05REF		
h	0.07	0.12	0.17

The diagram illustrates the DFN-2L package outline with two views: TOP VIEW and BOTTOM VIEW. The TOP VIEW shows the package from above with dimensions A (width), b (length), C (lead thickness), and A1 (lead height). The BOTTOM VIEW shows the package from below with dimensions D (total width), w (width of the central body), L2 (width of the lead frame), L1 (lead pitch), e (lead height), h (lead thickness), and a small dimension I. The diagram also includes a callout 'BOTTOM VIEW' pointing to the second view.

### Land Pattern

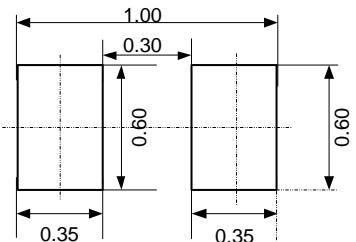

### Marking Codes

Part Number	DW12DF-B-E	Marking Code	AF
-------------	------------	--------------	----

### Package Information

Qty: 10k/Reel