


Features

- ✧ Small size of 2920/3425
- ✧ Fast tripping resettable circuit protection
- ✧ Surface mount packaging for automated assembly
- ✧ Agency recognition: UL、CSA、TUV

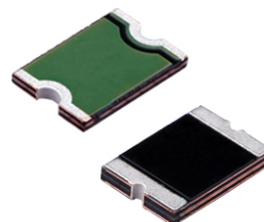

Product Dimensions

Size 7555mm/2920 mils

Part number	Dimension					Figures for Dimension
	Max.	Max.	Max.	Min.	Min.	
DW-SM030	7.98	3.18	5.44	0.50		S3
DW-SM050	7.98	3.18	5.44	0.50		S3
DW-SM075	7.98	3.18	5.44	0.50		S3
DW-SM110	7.98	3.18	5.44	0.50		S3
DW-SM125	7.98	3.18	5.44	0.50		S3
DW-SM260	7.98	3.18	5.44	0.50		S3
DW-SM300	7.98	3.18	5.44	0.50		S3
DW-SM030C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM050C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM075C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM110C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM125C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM130C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM150C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM185C	7.98	5.44	1.25	0.80	0.30	S2
DW-SM185C/33	7.98	5.44	1.25	0.80	0.30	S2
DW-SM200C	7.98	5.44	1.50	0.80	0.30	S2
DW-SM200C/24	7.98	5.44	1.50	0.80	0.30	S2
DW-SM250C	7.98	5.44	1.50	0.80	0.30	S2
DW-SM260C	7.98	5.44	1.50	0.80	0.30	S2
DW-SM260C/24	7.98	5.44	1.50	0.80	0.30	S2
DW-SM300C	7.98	5.44	1.50	0.80	0.30	S2
DW-SM300C/16	7.98	5.44	1.50	0.80	0.30	S2
DW-SM300C/24	7.98	5.44	1.50	0.80	0.30	S2

Part number	Dimension					Figures for Dimension
	A Max.	B Max.	C Max.	D Min.	E Min.	
DW-SM400C/16	7.98	5.44	2.00	0.80	0.10	S2
DW-SML500	7.98	5.44	0.80	0.60	0.10	S2
DW-SML550	7.98	5.44	0.80	0.60	0.10	S2
DW-SML600	7.98	5.44	0.80	0.60	0.10	S2
DW-SML650	7.98	5.44	0.80	0.60	0.10	S2

Size 8763mm/3425 mils

Part number	Dimension					Figures for Dimension
	A Max.	B Max.	C Max.	D Min.	E Min.	
DW-SM130	9.50	3.00	6.71	0.50		S3
DW-SM150	9.50	3.00	6.71	0.50		S3
DW-SM185	9.50	3.00	6.71	0.50		S3
DW-SM200	9.50	3.00	6.71	0.50		S3
DW-SM250	9.50	3.00	6.71	0.50		S3

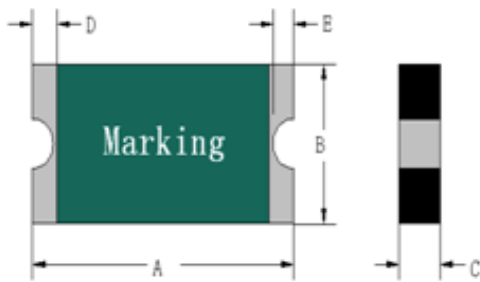


Figure S2

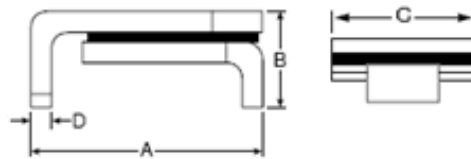


Figure S3

Thermal Derating Chart-IH(A)

Size 7555mm/2920 mils


Part number	Maximum Ambient Temperature									
	-40°C	-20°C	0°C	20°C	25°C	40°C	50°C	60°C	70°C	85°C
DW-SM030	0.48	0.41	0.35	0.32	0.30	0.25	0.23	0.19	0.15	0.10
DW-SM050	0.80	0.71	0.59	0.52	0.50	0.44	0.38	0.32	0.26	0.19
DW-SM075	1.21	1.05	0.89	0.78	0.75	0.64	0.56	0.49	0.41	0.28
DW-SM110	1.75	1.54	1.32	1.15	1.10	0.96	0.83	0.73	0.61	0.42
DW-SM125	1.99	1.75	1.51	1.30	1.25	1.07	0.94	0.83	0.69	0.46
DW-SM260	4.12	3.62	3.18	2.64	2.60	2.23	1.91	1.75	1.45	1.02
DW-SM300	4.74	4.21	3.63	3.05	3.00	2.59	2.25	2.02	1.65	1.18
DW-SM030C	0.47	0.43	0.38	0.31	0.30	0.24	0.21	0.18	0.16	0.11
DW-SM050C	0.81	0.73	0.63	0.52	0.50	0.44	0.36	0.33	0.26	0.21
DW-SM075C	1.21	1.08	0.93	0.79	0.75	0.64	0.54	0.49	0.41	0.30
DW-SM110C	1.76	1.57	1.36	1.15	1.10	0.96	0.80	0.72	0.61	0.43

Part number	Maximum Ambient Temperature									
	-40°C	-20°C	0°C	20°C	25°C	40°C	50°C	60°C	70°C	85°C
DW-SM125C	2.01	1.78	1.54	1.30	1.25	1.09	0.91	0.82	0.69	0.49
DW-SM130C	2.06	1.81	1.59	1.35	1.30	1.13	0.93	0.86	0.72	0.51
DW-SM150C	2.40	2.09	1.81	1.52	1.50	1.33	1.06	1.01	0.83	0.59
DW-SM185C	2.95	2.58	2.28	1.87	1.85	1.64	1.34	1.24	1.03	0.72
DW-SM185C/33	2.95	2.58	2.28	1.87	1.85	1.64	1.34	1.24	1.03	0.72
DW-SM200C	3.18	2.80	2.45	2.03	2.00	1.76	1.45	1.32	1.11	0.79
DW-SM200C/24	3.18	2.80	2.45	2.03	2.00	1.76	1.45	1.32	1.11	0.79
DW-SM250C	3.98	3.51	3.06	2.53	2.50	2.19	1.82	1.68	1.40	0.95
DW-SM260C	4.15	3.65	3.18	2.64	2.60	2.24	1.91	1.77	1.46	1.01
DW-SM260C/24	4.15	3.65	3.18	2.64	2.60	2.24	1.91	1.77	1.46	1.01
DW-SM300C	4.76	4.21	3.66	3.05	3.00	2.61	2.21	2.05	1.69	1.17
DW-SM300C/16	4.76	4.21	3.66	3.05	3.00	2.61	2.21	2.05	1.69	1.17
DW-SM300C/24	4.76	4.21	3.66	3.05	3.00	2.61	2.21	2.05	1.69	1.17
DW-SM400C/16	6.35	5.63	4.86	4.05	4.00	3.46	2.95	2.72	2.24	1.53
DW-SML500	8.09	7.14	6.19	5.23	5.00	4.28	3.81	3.33	2.86	2.14
DW-SML550	8.90	7.86	6.81	5.76	5.50	4.71	4.19	3.67	3.14	2.36
DW-SML600	9.71	8.57	7.43	6.28	6.00	5.14	4.57	4.00	3.43	2.57
DW-SML650	10.52	9.28	8.05	6.80	6.50	5.57	4.95	4.33	3.72	2.78


Size 8763mm/3425mils

Part number	Maximum Ambient Temperature									
	-40°C	-20°C	0°C	20°C	25°C	40°C	50°C	60°C	70°C	85°C
DW-SM130	2.05	1.84	1.59	1.32	1.30	1.12	0.94	0.87	0.73	0.49
DW-SM150	2.42	2.10	1.81	1.52	1.50	1.30	1.11	1.01	0.85	0.57
DW-SM185	2.96	2.62	2.26	1.88	1.85	1.59	1.36	1.26	1.03	0.69
DW-SM200	3.19	2.84	2.45	2.06	2.00	1.75	1.46	1.36	1.12	0.76
DW-SM250	3.99	3.54	3.06	2.56	2.50	2.18	1.85	1.71	1.41	0.94

Typical Time-to-Trip Charts at 25°C

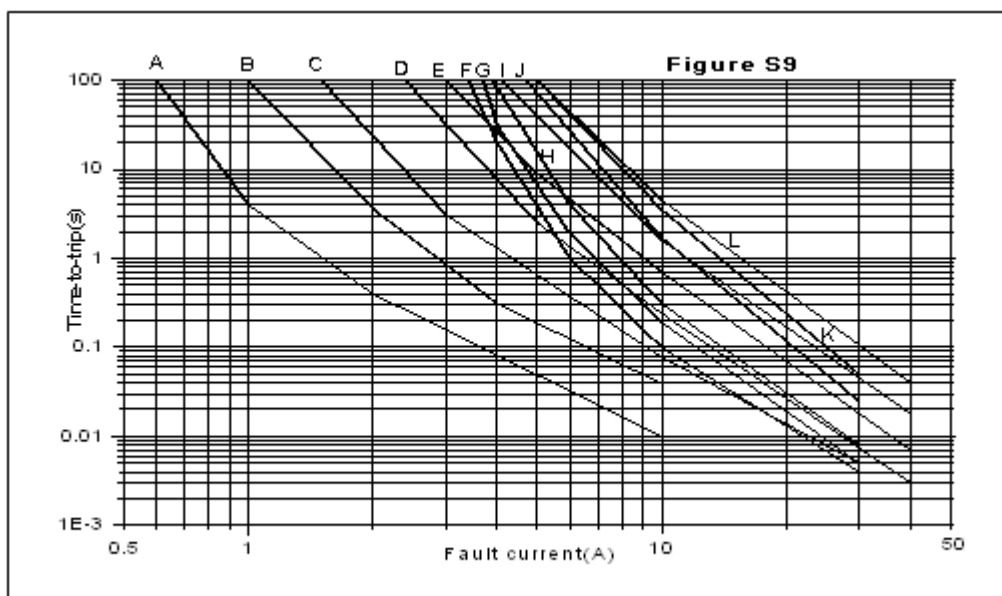

- DW-SM Series**
- A = DW-SM030
 - B = DW-SM050
 - C = DW-SM075
 - D = DW-SM110
 - E = DW-SM125
 - J = DW-SM260
 - L = DW-SM300
 - F = DW-SM130
 - G = DW-SM150
 - H = DW-SM185
 - I = DW-SM200

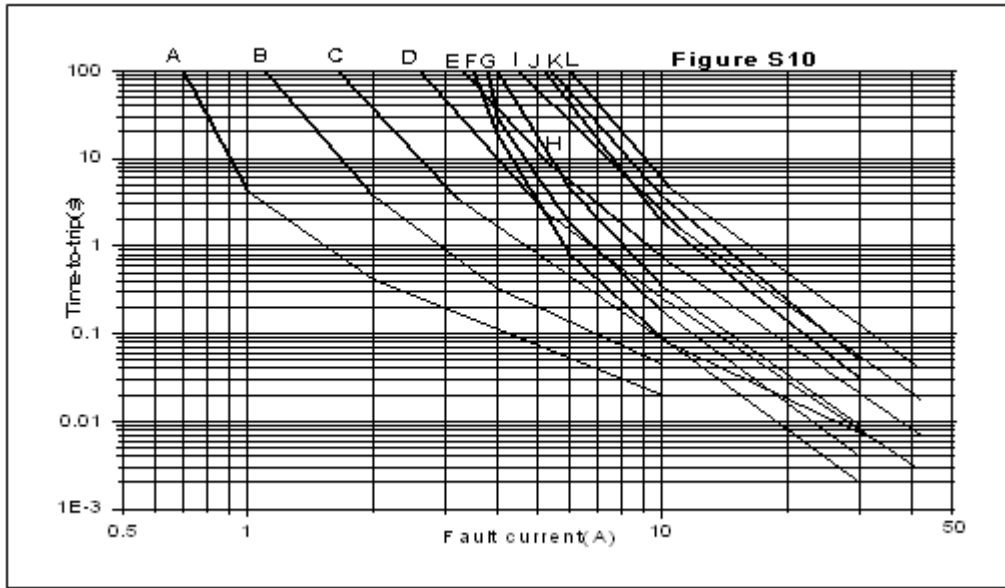

DW-SM Series

- A = DW-SM030C
- B = DW-SM050C
- C = DW-SM075C
- D = DW-SM110C
- E = DW-SM125C
- J = DW-SM260C
- L = DW-SM300C,
DW-SM300C/24
- F = DW-SM130C
- G = DW-SM150C
- H = DW-SM185C
- I = DW-SM200C
- K = DW-SM250C
- K = DW-SM250

Electrical Characteristics at 25°C

Size 7555mm/2920 mils

Part number	I _H (A)	I _T (A)	V _{max} (V)	I _{max} (A)	Max. Time-to-trip		Pd _{typ} (W)	R _{min} (Ω)	R _{1max} (Ω)	Figures for Dimension
					(A)	(S)				
DW-SM030	0.30	0.60	60	10	1.5	3.0	1.9	0.700	4.800	S3
DW-SM050	0.50	1.00	60	10	2.5	4.0	1.9	0.350	1.400	S3
DW-SM075	0.75	1.50	30	40	8.0	0.3	1.9	0.290	1.000	S3
DW-SM110	1.10	2.20	33	40	8.0	0.5	1.9	0.100	0.480	S3
DW-SM125	1.25	2.50	15	40	8.0	2.0	1.6	0.070	0.250	S3
DW-SM260	2.60	5.20	6	40	8.0	20.0	1.9	0.025	0.075	S3
DW-SM300	3.00	6.00	6	40	8.0	35.0	1.9	0.015	0.048	S3
DW-SM030C	0.30	0.60	60	10	1.5	3.0	1.9	0.700	4.800	S2
DW-SM050C	0.50	1.00	60	10	2.5	4.0	1.9	0.350	1.400	S2
DW-SM075C	0.75	1.50	30	40	8.0	0.3	1.9	0.290	1.000	S2
DW-SM110C	1.10	2.20	33	40	8.0	0.5	1.9	0.100	0.480	S2
DW-SM125C	1.25	2.50	15	40	8.0	2.0	1.6	0.070	0.250	S2
DW-SM130C	1.30	2.60	33	40	8.0	4.0	2.1	0.080	0.280	S2
DW-SM150C	1.50	3.00	33	40	8.0	5.0	2.1	0.060	0.250	S2
DW-SM185C	1.85	3.70	15	40	8.0	5.0	2.1	0.045	0.165	S2
DW-SM185C/33	1.85	3.70	33	40	8.0	5.0	2.1	0.045	0.165	S2
DW-SM200C	2.00	4.00	15	40	8.0	12.0	2.1	0.045	0.125	S2
DW-SM200C/24	2.00	4.00	24	40	8.0	12.0	2.1	0.045	0.125	S2
DW-SM250C	2.50	5.00	15	40	8.0	25.0	1.9	0.025	0.085	S2
DW-SM260C	2.60	5.20	6	40	8.0	20.0	1.9	0.025	0.075	S2
DW-SM260C/24	2.60	5.20	24	40	8.0	20.0	1.9	0.025	0.075	S2
DW-SM300C	3.00	6.00	6	40	8.0	35.0	1.9	0.015	0.048	S2
DW-SM300C/16	3.00	6.00	16	40	8.0	35.0	1.9	0.015	0.048	S2
DW-SM300C/24	3.00	6.00	24	40	8.0	35.0	1.9	0.015	0.048	S2

Part number	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	Max. Time-to-trip		Pd_{typ} (W)	R_{min} (Ω)	R_{1max} (Ω)	Figures for Dimension
					(A)	(S)				
DW-SM400C/16	4.00	8.00	16	40	8.0	40.0	1.9	0.012	0.010	S2
DW-SML500	5.00	10.00	6	50	25.0	5.0	1.5	0.002	0.02	S2
DW-SML550	5.50	11.00	6	50	27.5	5.0	1.5	0.002	0.016	S2
DW-SML600	6.00	12.00	6	50	30.0	5.0	1.5	0.001	0.014	S2
DW-SML650	6.50	13.00	6	50	32.5	5.0	1.5	0.001	0.012	S2

Size 8763mm/3425 mils

Part number	I_H (A)	I_T (A)	V_{max} (V)	I_{max} (A)	Max. Time-to-trip		Pd_{typ} (W)	R_{min} (Ω)	R_{1max} (Ω)	Figures for Dimension
					(A)	(S)				
DW-SM130	1.30	2.60	33	40	8.0	4.00	2.1	0.080	0.280	S3
DW-SM150	1.50	3.00	33	40	8.0	5.00	2.1	0.060	0.250	S3
DW-SM185	1.85	3.70	33	40	8.0	5.00	2.1	0.045	0.165	S3
DW-SM200	2.00	4.00	15	40	8.0	12.00	2.1	0.045	0.125	S3
DW-SM250	2.50	5.00	15	40	8.0	25.00	1.9	0.025	0.085	S3

I_H =Hold current: maximum current at which the device will not trip at 25°C still air.

I_T =Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.


T_{trip} =Maximum time to trip at assigned current.

Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.


R_{min} =Minimum device resistance at 25°C prior to tripping.

R_{1max} =Maximum device resistance measured in the nontripped state 1 hour post reflow.

Marking System

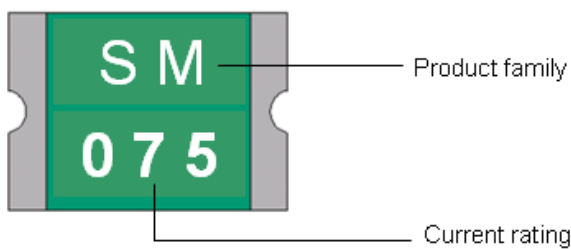

Part Numbering System

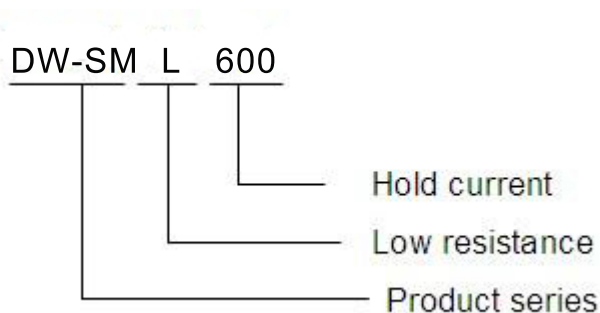

Test Procedures And Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq$ maximum Time to Trip
Hold Current	30min, at I_H	No trip
Trip Cycle Life	V_{max} , I_{max} , 100cycles	No arcing or burning
Trip Endurance	V_{max} , 24hours	No arcing or burning

Packaging and Marking Information


Size 7555mm/2920 mils

Part number	Tape & Reel Quantity	Tape spc code	Part Marking	Recommended Pad Layout Figures[mm(In.)]						Agency Recognition
				Dimension A(Nom.)		Dimension B(Nom.)		Dimension C(Nom.)		
DW-SM030	2000	2920A	※030	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM050	2000	2920A	※050	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM075	2000	2920A	※075	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM110	2000	2920A	※110	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM125	2000	2920A	※125	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM260	2000	2920A	※260	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	UL,CSA,TUV
DW-SM300	2000	2920A	※300	5.10	(0.201)	2.30	(0.091)	3.10	(0.121)	TUV
DW-SM030C	4000	2920B	SM030	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM050C	4000	2920B	SM050	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM075C	4000	2920B	SM075	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM110C	4000	2920B	SM110	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM125C	4000	2920B	SM125	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM130C	4000	2920B	SM130	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM150C	4000	2920B	SM150	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM185C	4000	2920B	SM185	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM185C/33	4000	2920B	SM185	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SM200C	4000	2920B	SM200	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM200C/24	6000	2920C	SM200	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SM250C	4000	2920B	SM250	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM260C	4000	2920B	SM260	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA,TUV
DW-SM260C/24	4000	2920B	SM260	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SM300C	4000	2920B	SM300	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	TUV
DW-SM300C/16	4000	2920B	SM300	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SM300C/24	4000	2920B	SM300	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SM400C/16	4000	2920B	SM400	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SML500	6000	2920C	X2	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SML550	6000	2920C	X3	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SML600	6000	2920C	X1	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA
DW-SML650	6000	2920C	X4	4.60	(0.181)	2.00	(0.081)	5.30	(0.211)	UL,CSA

Size 8763mm/3425 mils

Part number	Tape & Reel Quantity	Tape spc code	Part Marking	Recommended Pad Layout Figures[mm(In.)]			Agency Recognition
				Dimension A(Nom.)	Dimension B(Nom.)	Dimension C(Nom.)	
DW-SM130	1500	3425A	⊗130	6.10 (0.181)	2.30 (0.091)	4.60 (0.421)	UL,CSA,TUV
DW-SM150	1500	3425A	⊗150	6.10 (0.181)	2.30 (0.091)	4.60 (0.421)	UL,CSA,TUV
DW-SM185	1500	3425A	⊗185	6.10 (0.181)	2.30 (0.091)	4.60 (0.421)	UL,CSA,TUV
DW-SM200	1500	3425A	⊗200	6.10 (0.181)	2.30 (0.091)	4.60 (0.421)	UL,CSA,TUV
DW-SM250	1500	3425A	⊗250	6.10 (0.181)	2.30 (0.091)	4.60 (0.421)	UL,CSA,TUV

Solder Pad Layouts

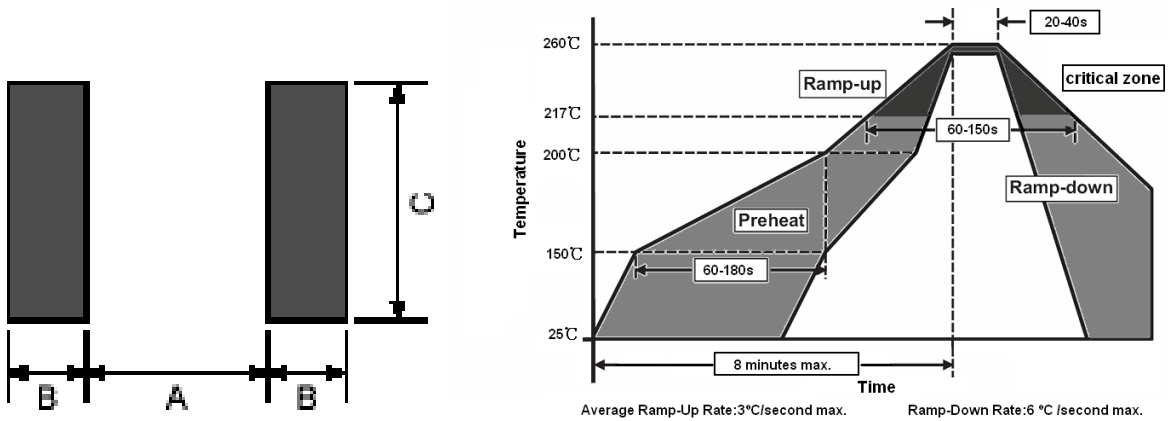


- * Recommended reflow methods: IR, Vapor phase oven, hot air oven, wave solder.
- * Devices can be cleaned using standard industry methods and solvents.

Notes:

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Tape Specification And Reel Dimensions

Tape spc code	W	P0	P1	P2	A	B	D	F	E	T	K
2920(A)	16.0±	4.00	8.00	2.00	5.60	8.10	1.55	7.50	1.75	0.30	3.40
	0.10	±	±	±	±	±	±	±	±	±	±
		0.10	0.10	0.10	0.10	0.10	0.05	0.10	0.10	0.05	0.10
2920(B)	16.0±	4.00	8.00	2.00	5.60	8.10	1.55	7.50	1.75	0.30	1.50
	0.10	±	±	±	±	±	±	±	±	±	±
		0.10	0.10	0.10	0.10	0.10	0.05	0.10	0.10	0.05	0.10
3425(A)	16.15	4.00	12.0	2.00	6.90	9.40	1.55	7.50	1.75	0.30	3.40
	±0.15	±	±	±	±	±	±	±	±	±	±
		0.10	0.10	0.10	0.10	0.10	0.05	0.10	0.10	0.05	0.10

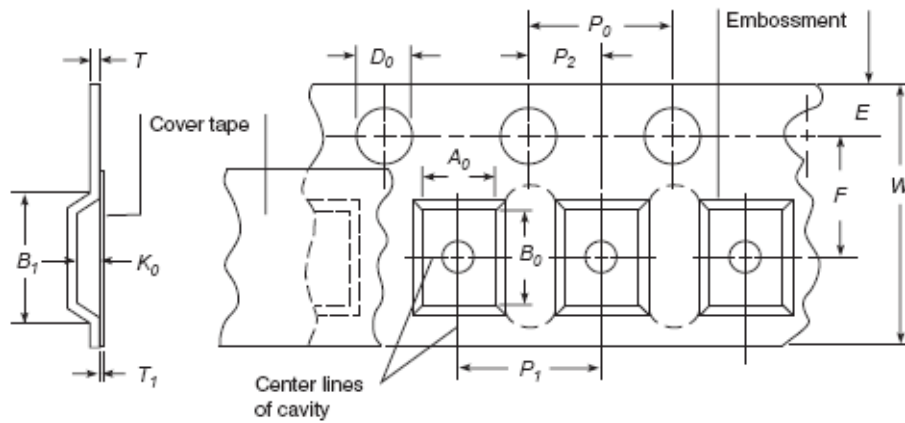

Reel Dimensions

Tape spc code	A	N	W1	W2
2920(A)	330+0/-1.5	100+1/-0	16.4+1/-0	24.2+1/-0
2920(B)	330+0/-1.5	100+1/-0	16.4+1/-0	24.2+1/-0
3425(A)	330+0/-1.5	100+1/-0	16.4+1/-0	24.2+1/-0

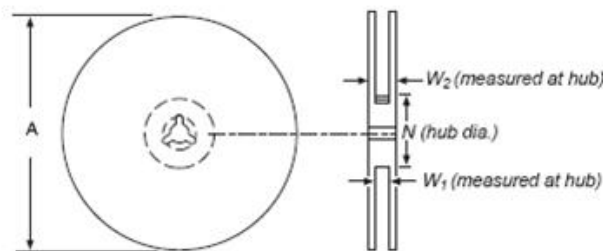

Storage

The maximum ambient temperature shall not exceed 40°C. Storage temperatures higher than 40°C could result in the deformation of packaging materials. The maximum relative humidity recommended for storage is 70%. High humidity with high temperature can accelerate the oxidation of the solder plating on the termination and reduce the solderability of the components. Sealed plastic bags with desiccant shall be used to reduce the oxidation of the termination and shall only be opened prior to use. The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

Warning:

PPTC devices are intended for protection against occasional over-current or over-temperature fault conditions, and should not be used when repeated fault conditions are anticipated. Operation beyond maximum ratings or improper use may result in device damage and possible electrical arcing and flame.