




## Features

- Small Body Outline Dimensions:
- Protects one I/O or power line
- Working Voltage: 7V
- Low Leakage Current
- Response Time is Typically < 1 ns

## IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 13A (8/20μs)

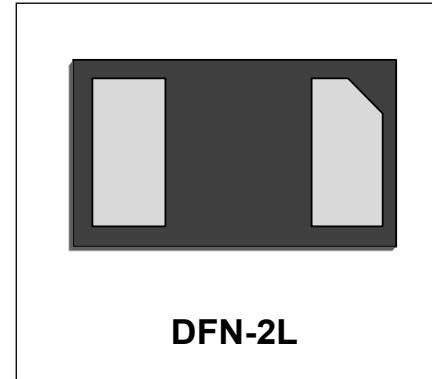

DFN-2L


## Mechanical Characteristics

- DFN-2L package
- Molding compound flammability rating:  
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

## Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

## Schematic & PIN Configuration

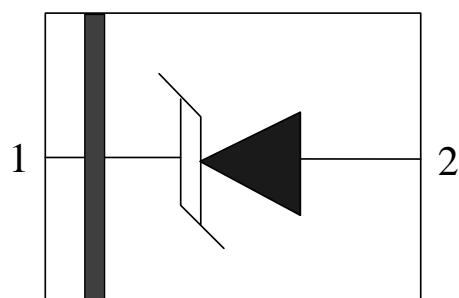




### Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$I_{PP}$	220	Watts
Electrostatic discharge Voltage	$V_{ESD}$	30 (contact)	KV
		30 (air)	
Operating Temperature	$T_J$	-55 to +125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

### Electrical Parameters (T=25°C)

Symbol	Parameter
$I_{PP}$	Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

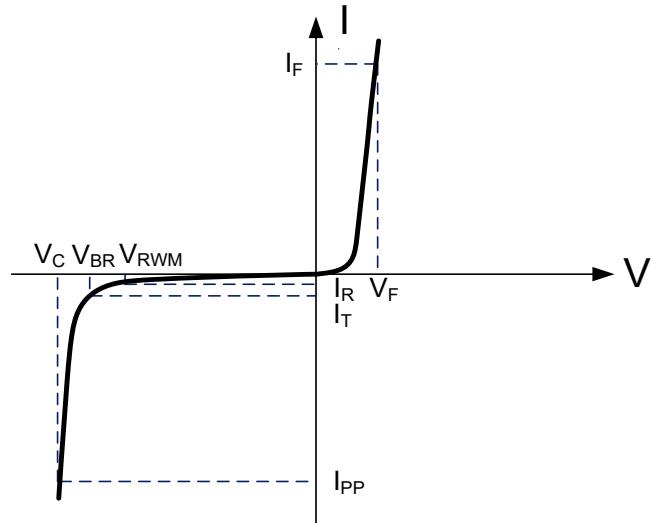


### Electrical Characteristics

DW07DF-E						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$				7.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	7.8			V
Reverse Leakage Current	$I_R$	$V_{RWM}=7V, T=25^\circ C$			500	nA
Peak Pulse Current	$I_{PP}$	$t_p=8/20\mu s$			13	A
Clamping Voltage	$V_C$	$I_{PP}=1A, t_p=8/20\mu s$			9.5	V
Clamping Voltage	$V_C$	$I_{PP}=13A, t_p=8/20\mu s$		15	17	V
Junction Capacitance	$C_J$	$V_R=0V, f=1MHz$		63	70	pF




## Typical Characteristics


**Figure 1: Peak Pulse Power Vs Pulse Time**

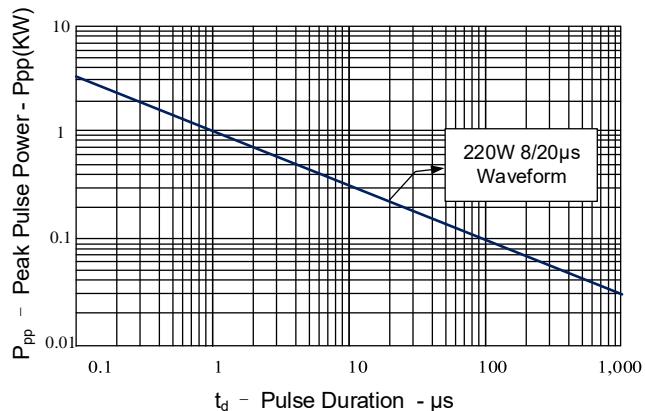


**Figure 2: Power Derating Curve**

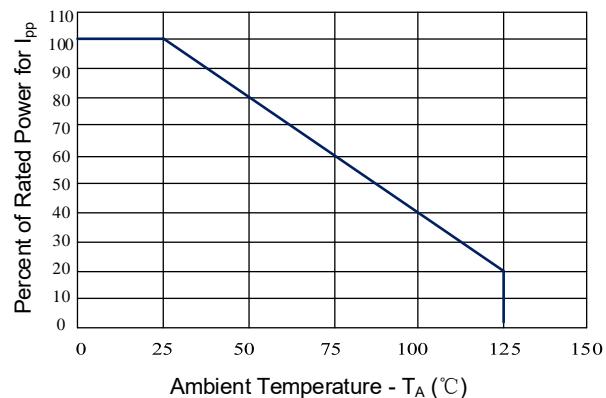


**Figure 3: Clamping Voltage vs. Peak Pulse Current**

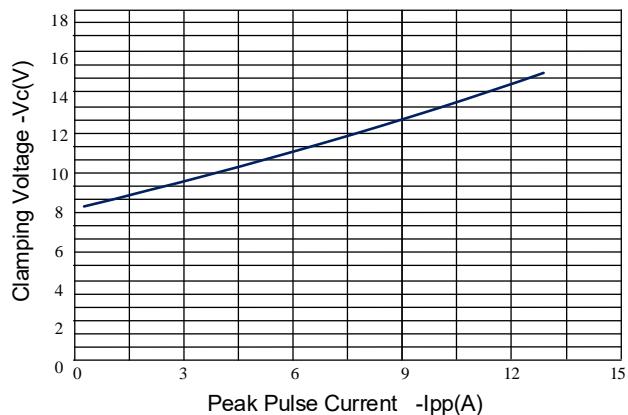


**Figure 4: Normalized Junction Capacitance vs. Reverse Voltage**

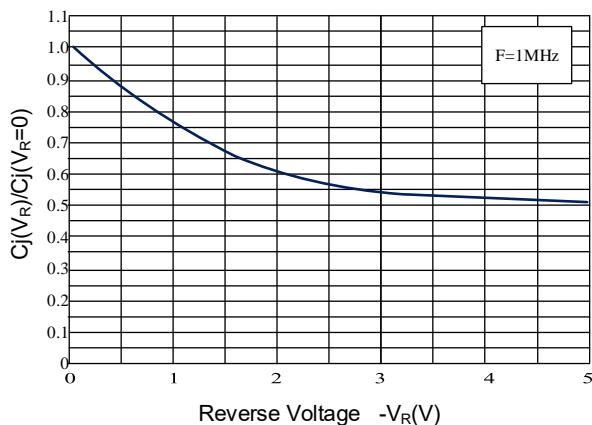

**Figure 5: Pulse Waveform**

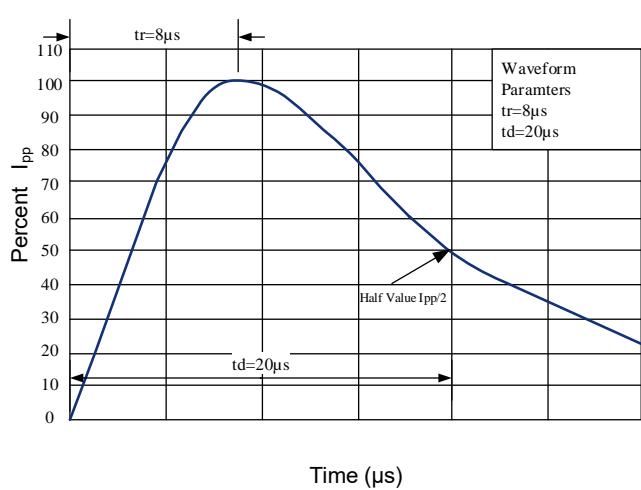

**Figure 6: ESD Clamping( 8kV Contact per IEC 61000-4-2)**

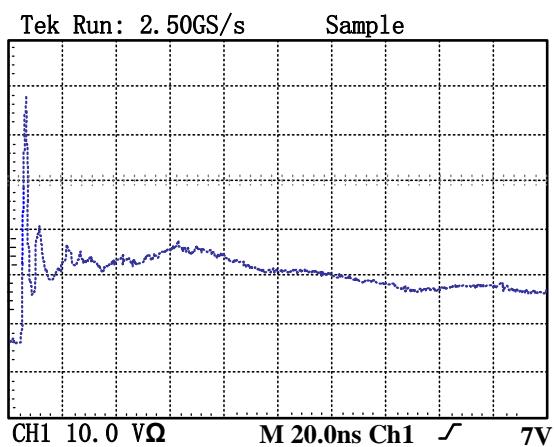



## Outline Drawing –DFN-2L

PACKAGE OUTLINE				
SYMB	MILIMETER			
	OL	MIN	NOM	MAX
A	0.45	0.50	0.55	
A1	0.00	0.02	0.05	
b	0.45	0.50	0.55	
C	0.12	0.15	0.18	
D	0.95	1.00	1.05	
e	0.65BSC			
E	0.55	0.60	0.65	
L	0.20	0.25	0.30	
L1	0.05REF			
h	0.07	0.12	0.17	

**Land Pattern**

## Marking Codes

Part Number	DW07DF-E	Marking Code	1   P 7   2
-------------	----------	--------------	-------------

## Package Information

Qty: 10k/Reel