




Features

- Small Body Outline Dimensions:
- Protects one I/O line
- Working Voltage: 12 V
- Low Leakage Current
- Response Time is Typically < 1 ns

IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 10\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 4A (8/20 μs)

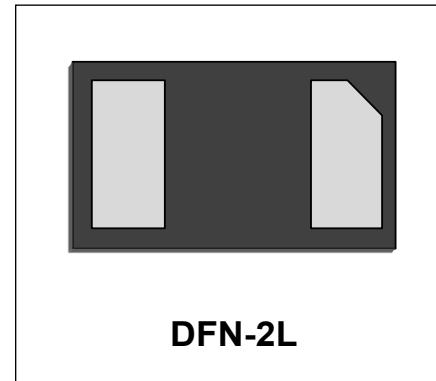

DFN-2L


Mechanical Characteristics

- DFN-2L package
- Molding compound flammability rating:
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

Schematic & PIN Configuration

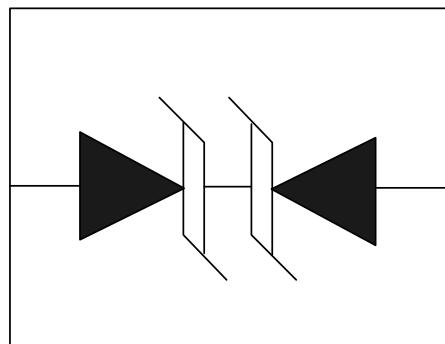




Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	150	Watts
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	4	A
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_c	Clamping Voltage @ I_{PP}
V_{RWM}	Reverse Stand-Off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current

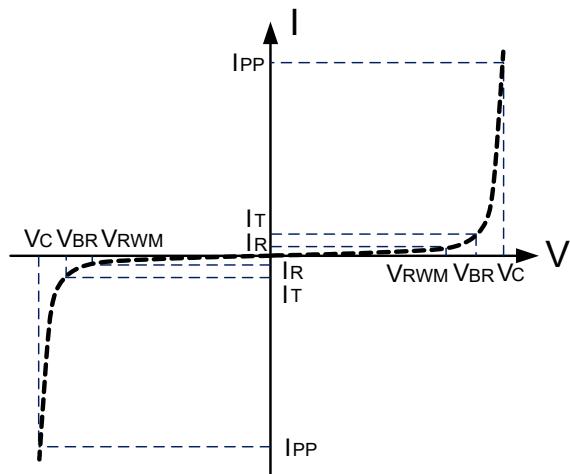

Electrical Characteristics

DW12DRF-B-E						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				12	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	13.3			V
Peak Pulse Current	I_{PP}	$t_p=8/20\mu s$			4	A
Clamping Voltage	V_c	$I_{PP}=1A, t_p=8/20\mu s$	22	25		V
Clamping Voltage	V_c	$I_{PP}=4A, t_p=8/20\mu s$	32	35		V
Reverse Leakage Current	I_R	$V_{RWM}=12V, T=25^\circ C$			200	nA
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$	0.6	0.8		pF

Note1: ESD Pulse Waveform according to IEC 61000-4-2 , see Table1 and Figure1

Note2: ESD tests Setup see Figure2.

Note3: The clamping Voltage data is taken with a 100x attenuator.



Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

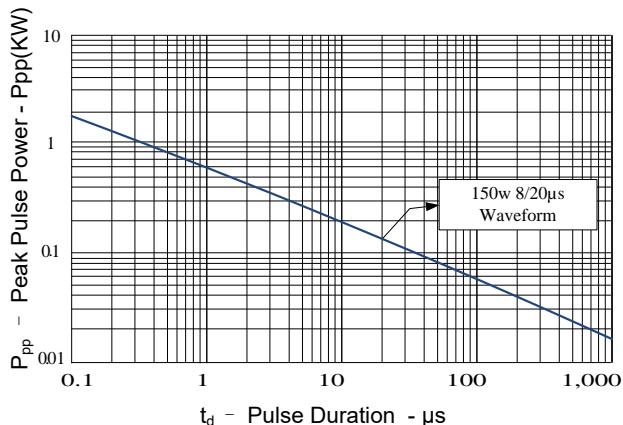


Figure 2: Power Derating Curve

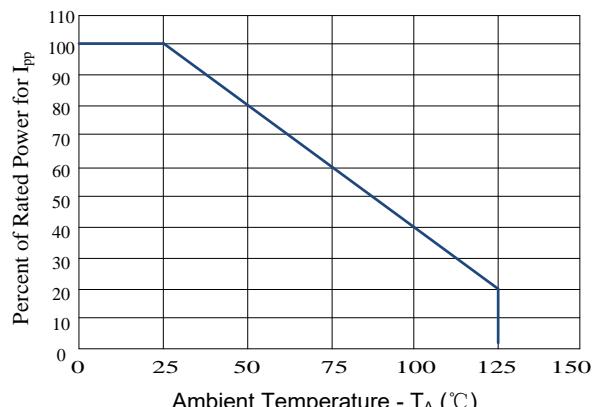


Figure 3: Clamping Voltage vs. Peak Pulse Current

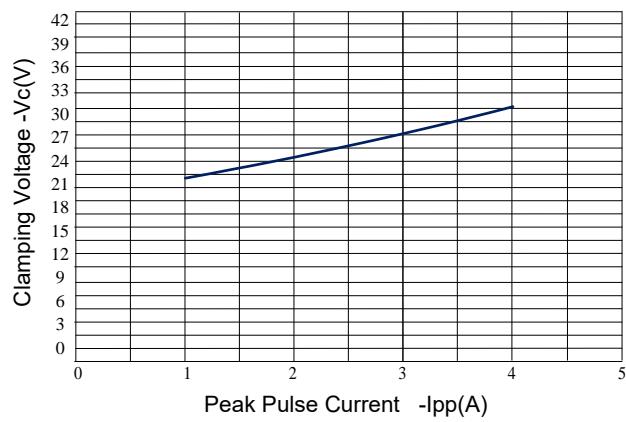


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage


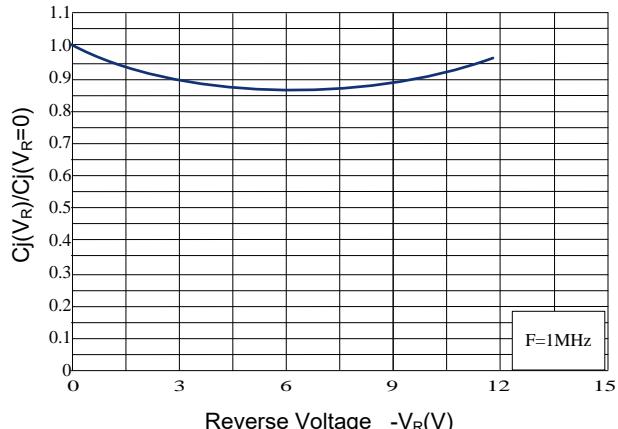


Figure 5: 8/20 μs Pulse Waveform



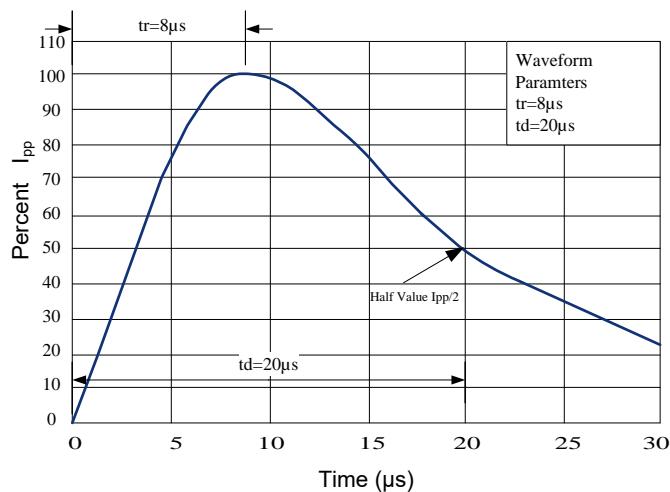

Outline Drawing –DFN-2L

PACKAGE OUTLINE			
SYMB	MILIMETER		
OL	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
C	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05REF		
h	0.07	0.12	0.17

Land Pattern

Marking Codes

Part Number	DW12DRF-B-E	Marking Code	NN
-------------	-------------	--------------	----

Package Information

Qty: 10k/Reel